


Floorliner™ is a cushioned non-woven with an impermeable top layer. It provides ideal non-slip protection for floors, stairs and other surfaces - even under unfavourable conditions, its exclusive high-tech fibre and adhesive composite base makes it easy to lay and secure without the need for adhesive tape, remove without residue and reuse.

Floorliner™ FR is ideal for specialist applications requiring a flame retardant function in addition to non-slip, robust, tear-resistant impact protection and impermeable protection from all kinds of liquids, paints and solvents.

Floorliner™ offers multifunctional and mechanically resistant protection for the most demanding applications including those where breathability is of importance.

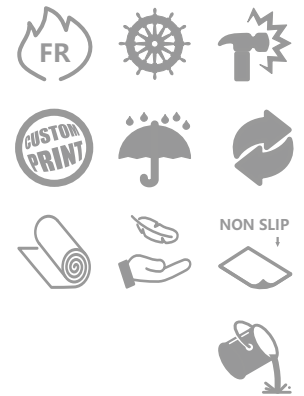

	<b>TPT Floorliner Vapor</b>	<b>TPT Floorliner Original</b>	<b>TPT Floorliner FR</b>
Description	Polyester Non-woven Fleece	Polyester Non-woven Fleece	Polyester Non-woven Fleece
Reverse	Opticoat™ Anti-slip Coating	Opticoat™ Anti-slip Coating	Opticoat™ Anti-slip Coating
Top Layer	Permeable PE Film	Impermeable PE Film	Impermeable PE Film
Thickness	>1.8mm	>1.8mm	>1.8mm
Weight	180g/sqm	180g/sqm	180g/sqm
Tensile Strength	>3kN/m	>4kN/m	>4kN/m
Colour	White	White	Pale Green Tint
Print	Identifying or Custom Print	Identifying or Custom Print	FR Cert. and Custom Print
Roll Width	1.0m	1.0m	1.0m
Roll Length	50m	50m	50m
Roll Area	50sqm	50sqm	50sqm
Roll Weight	9kg	9kg	9kg
Extras	Water Vapor Permeable >15g/sqmd		
FR Approvals	IMO Res. MSC.307(88)-2010 EN13501-1 Bfl, s1		

#### Disclaimer

Temprotech products are subject to strict quality control and prove their quality under the most demanding conditions. All information and recommendations are provided to the best of our knowledge on the basis of our practical experience. Temprotech can make no warranties, express or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. Therefore, the user is responsible for determining whether a product is fit for a particular purpose and suitable for the user's method, application and environment. If you are in any doubt, our technical support staff will be glad to support you.